


- |  |  |
|--|--|
| GT533-TDB Finish(B) <input type="checkbox"/>   | GT533-TDD Finish(D) <input type="checkbox"/>     |
| GT533-TDBG Finish(BG) <input type="checkbox"/> | GT533-TDS Finish(S) <input type="checkbox"/>     |
| GT533-TDC Finish(C) <input type="checkbox"/>   | GT533-TDSDB Finish(SDB) <input type="checkbox"/> |
|  | GT533-TDY Finish(Y) <input type="checkbox"/>     |

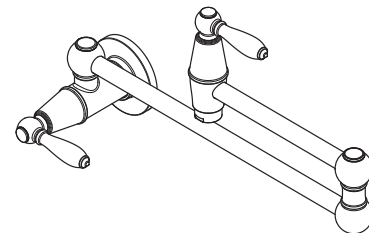

## Specifications

### Features

- 3.0 GPM Flow Rate
- 1-Hole Installation
- All Metal Construction
- 360° Rotating Spout
- Dual Shut Off Levers
- Mounting Hardware Included
- Swing Out Design
- Spot Defense™ Finish Resists Spots and Fingerprints (SDB Only)
- Cold Water Installation Recommended
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty

- Wall Mount Installation
- Pforever Seal™


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

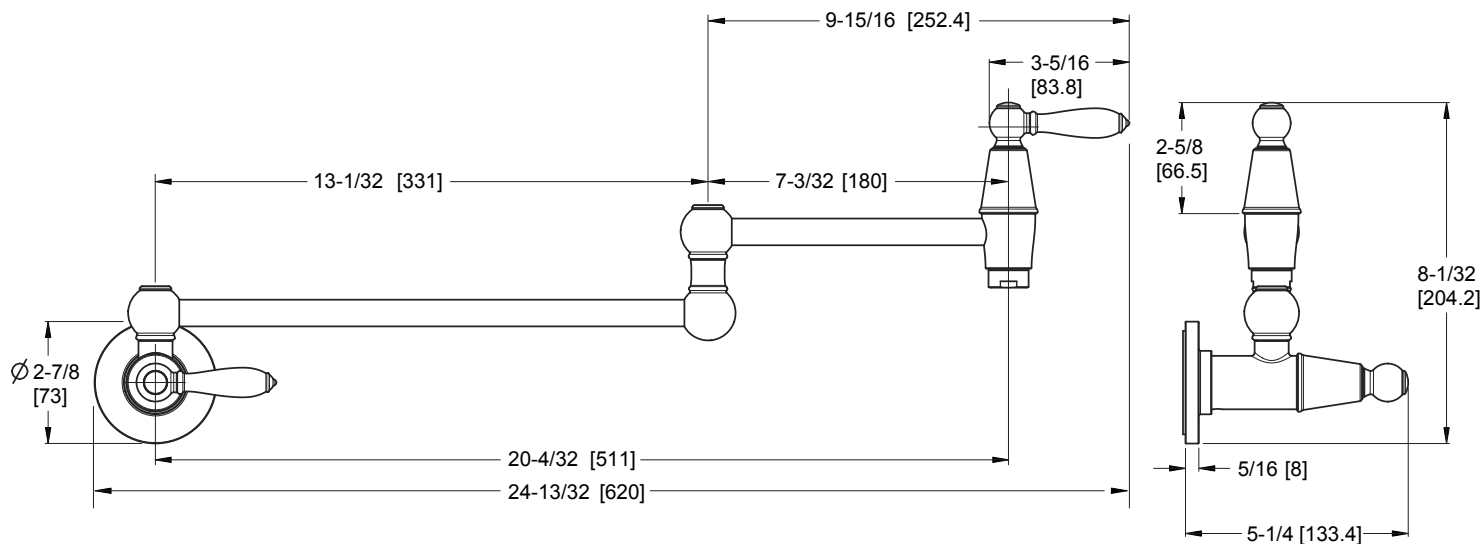

Pipe Size: 1/2-14 NPT-2B

Pipe's Protrusion From Wall: 5/16" (7.9mm) Min.

Wall Hole Size: 1-3/8 (34.9mm) min to 1-1/2 (38.1mm) Max.